



### M-2.6 Hexscrew

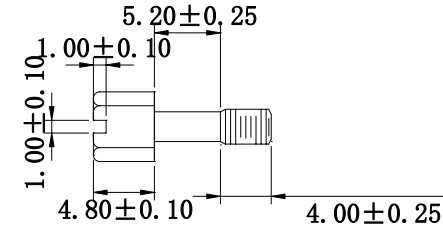

DGC 09 M/M GENDER CHANGER

PIN OUT: 9Male

9Male

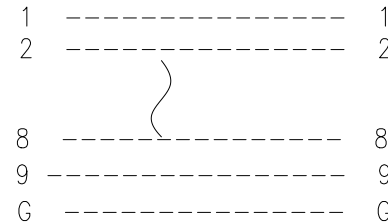

Label: yellow color with black character

One side: MINI GENDER CHANGER

The other side: U.S.A. PATENT 5199906

GENDER  
CHANGER

SPECIFICATION

INSULATOR: PBT Glass fibre reinforced UL 94 V0

CONTACT: Brass

CONTACT PLATING: Gold plated over nickel

SHELL: Tin Plated Shell

CURRENT RATING: 3 AMP

DIELECTRIC STRENGTH: 1000V AC for one Minute

INSULATOR RESISTANCE: 1000M  $\Omega$  min at 500V DC

TEMPERATURE: -55°C --- +105°C

NET MECHANISM Corp  
www.cabling-ol.net

SCALE	NONE	⊕	REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	11/13/04			
TITLE				
DB9 M/M ADAPTER				
PART NO. DG-9MM-M26				