

A

B

C

D


A

B



C

D



REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	First Version	2017/04/27	

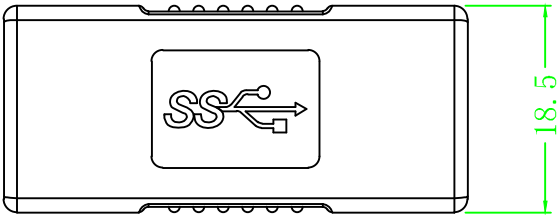

CN1

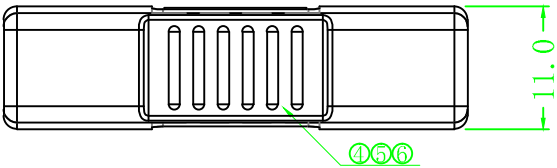

CN2

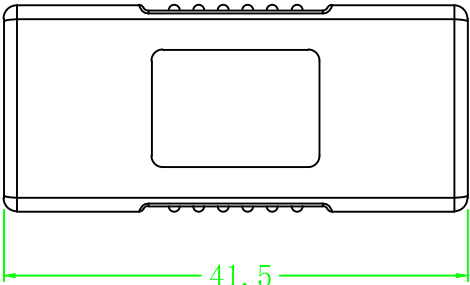

接点表

CN1	CN2
01	01
02	02
03	03
04	04
05	08
06	09
07	07
08	05
09	06
SHELL	SHELL

- 注：
1. 100%短/断路&错线测试条件。
 2. 导通阻抗 $\leq 5\ \Omega$ ，绝缘阻抗 $\geq 10\text{M}\ \Omega$ ，高压测试, DC 300V/10mS。
 3. 产品采用PCB连接。
 4. 所用材质须符合ROHS要求。

6	外 模	PVC胶料 45P 黑色	5. 09. 02-1	3.1G
5	内 模	PE胶料 透明	5. 09. 01-0	1.9G
4	内连接	PCB板 T=1.0MM	5. 12. 143	1PCS
3	内连接	USB 3.0 AF 铁护套 镀镍	5. 17. 20	2PCS
2	连接器	USB 3.0 AF 铁壳镀镍 PIN针镀金G/F 蓝胶	5. 03. 06	1PCS
1	连接器	USB 3.0 AF 铁壳镀镍 PIN针镀金G/F 蓝胶	5. 03. 06	1PCS
序号	名 称	材 料	物料编号	用量

X±0.50	X°±5.0°	NAME: BE			
.X±0.30	.X°±2.0°				
.XX±0.10	.XX°±1.0°	UNITS: MM	PART NO.: FCAG-FAGF-C01A	TITLE: USB 3.0 A/F to A/F, Molding, 180°, Adapter, Black.	
.XXX±0.05	.XXX°±0.5°				
				DWG NO.: FCAG-FAGF-C01A	
		APPD BY	CHECK BY	DRAWN BY	
					SCALE SHEET REV.
					NONE 1/1 A