


ISS SYMBOL		REVISIONS
A1		DESCRIPTION/DATE
		由BJ-8854-88BNTG002-R 型式轉來 \10/13/06

REMARK: 1. RoHS COMPLIANT
(符合 RoHS)
2. ACCEPTS $\phi 0.54 \sim \phi 1.06$ PINS
(允許 $\phi 0.54 \sim \phi 1.06$ 公針配合)

FOR CUSTOMER

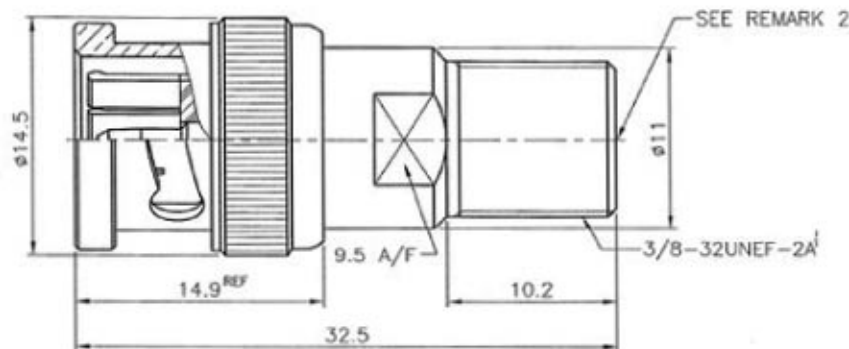

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. BERYLLIUM COPPER PER QQ-C-530

SHELL	NOTE 1	NOTE 2	
GASKET	RUBBER	RED	
C RING	SS41	NOTE 2	
SPRING	SK5	NOTE 2	
WASHER	SS41	NOTE 2	
INSULATOR	NOTE 4	WHITE	
CONTACT PIN	NOTE 5	NOTE 3	
CONTACT PIN	NOTE 1	NOTE 3	
INSULATOR	NOTE 4	WHITE	
BODY	NOTE 1	NOTE 2	

DIMENSIONS ARE IN MILLIMETERS		PART NO.	
UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	
(一級公差)		DATE	
0.5~6 = ±0.2		10/13/06	
>6~30 = ±0.4		CHECKED	
>30~120 = ±0.6		DATE	
>120~315 = ±1		10/13/06	
>315~1000 = ±1.6		DRAWN	
ANGLES(角度) = ±5°		DATE	
		10/13/06	

TITLE
BNC PLUG TO F JACK ADAPTOR
(75 ohms)

DRAWING NO. 70P72JNS7BF000B

FILE NO. Z:\NND\70P\72\JNS7\000\BFB-A1