


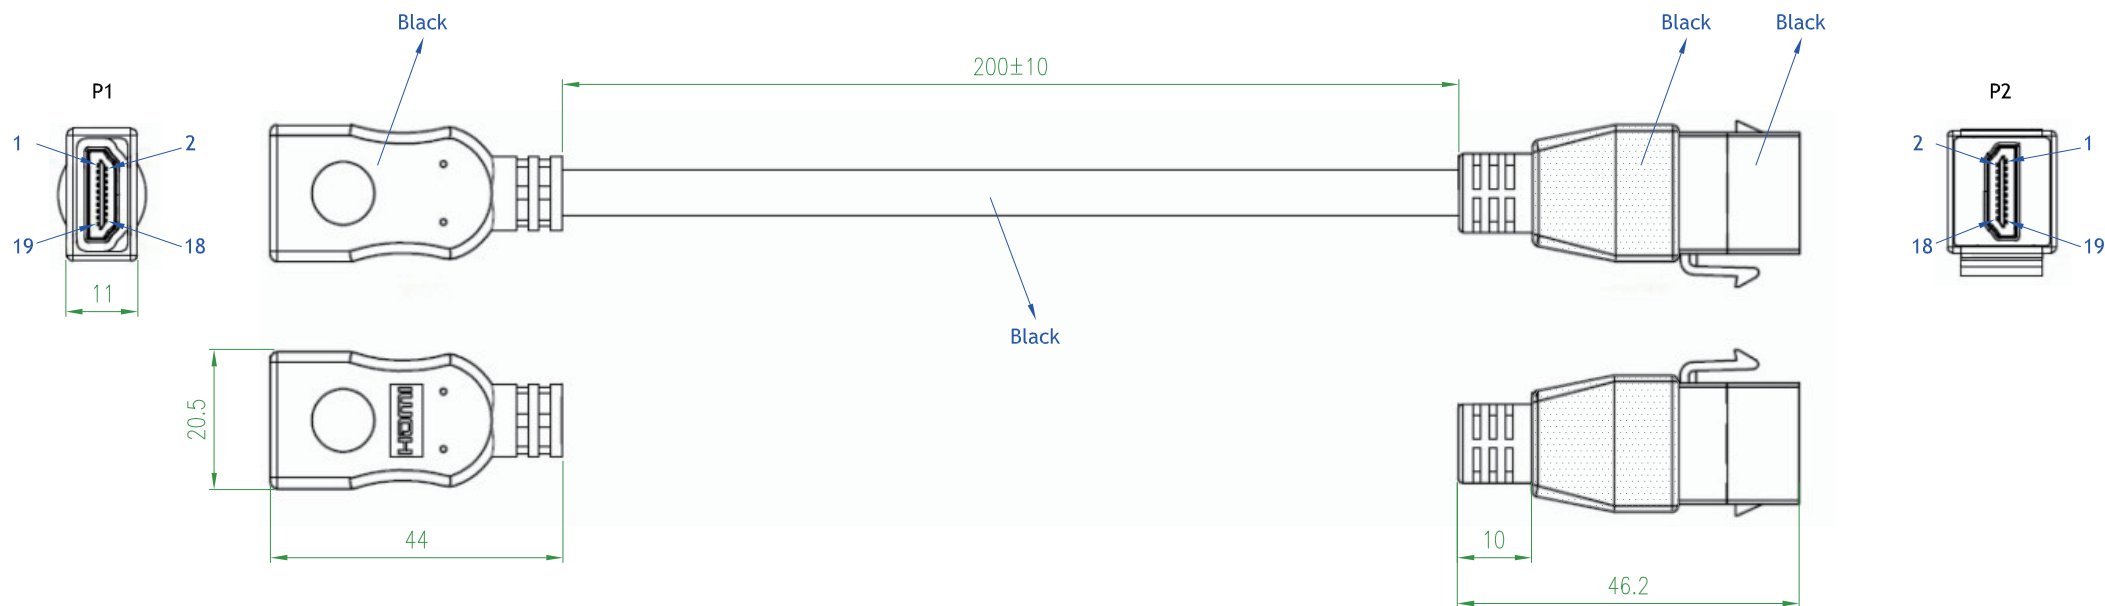

MATERIAL

- HDMI version 2.0, AF 19pins
- Cable Outer: PVC 45P, black
- Cable Inner: PE, transparent
- Cable OD: 7.3mm, UL 20276
- Wire thickness: 30AWG
- Keystone: ABS, black

ELECTRICAL TEST:

1. 100% test open short mis-wire
2. Conductor resistance: 3Ω max.
3. Insulation resistance: $5M\Omega$
4. Hi-pot: 300v DC/10ms
5. Real test passed

Wiring

P1		P2
01	○	01
02	○	02
03	○	03
04	○	04
05	○	05
06	○	06
07	○	07
08	○	08
09	○	09
10	○	10
11	○	11
12	○	12
14	○	14
17	○	17
19	○	19
13		13
15		15
16		16
18		18
SHELL		SHELL

DRAWN BY					PART NO. HDMI-AMSCAM-0200-BK CUSTOMER P/N.					VER. 1	
APPROVED BY											
UNIT: mm [inch]											
TOLERANCES:											
~20	~50	~150	150~	ANGLE							
±0.2	±0.4	±0.5	±1.5	±2°							
3rd Angle Projection					DATE 2025.8.26			SCALE X		SHEET 1/1	