


REVISIONS

ISS	SYMBOL	DESCRIPTION\DATE

 MARK: RoHS COMPLIANT
 (符合 RoHS)

FOR CUSTOMER

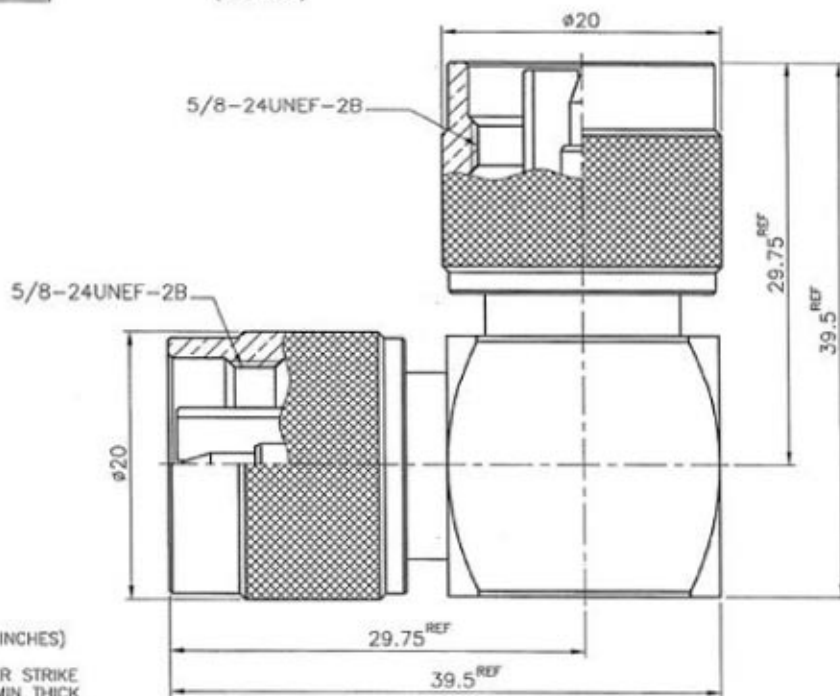

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
- BRASS PER QQ-B-626
 - NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
 - TEFLON ML-P-19468

					DIMENSIONS ARE IN MILLIMETERS			PART NO.	
SHELL	NOTE 1	NOTE 2			UNLESS OTHERWISE SPECIFIED TOLERANCES (- 公差) 0.5-6 = ±0.2 >6-30 = ±0.4 >30-120 = ±0.6 >120-315 = ±1 >315-1000 = ±1.6 ANGLES(角度) = ±5°			APPROVED	DATE
C RING	NOTE 1	NOTE 2						<i>Awk</i>	12/25/09'
GASKET	SILICONE	RED						CHECKED	DATE
BODY	NOTE 1	NOTE 2						<i>Awk</i>	12/25/09'
INSULATOR	NOTE 4	WHITE						DRAWN	DATE
CONTACT PIN	NOTE 1	NOTE 3						<i>Awk</i>	12/25/09'
CUBE BODY	NOTE 1	NOTE 2							
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	2.5/1	ISSUE	A1

TITLE

N R/A PLUG TO PLUG ADAPTOR

DRAWING NO.

7328NR500BF000B

FILE NO. Z:\MIND\7328\NR\500\000\7328NR500BF000B-A1