

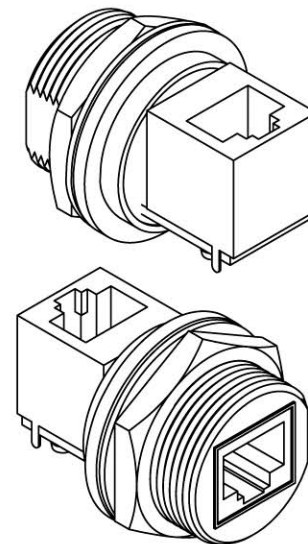

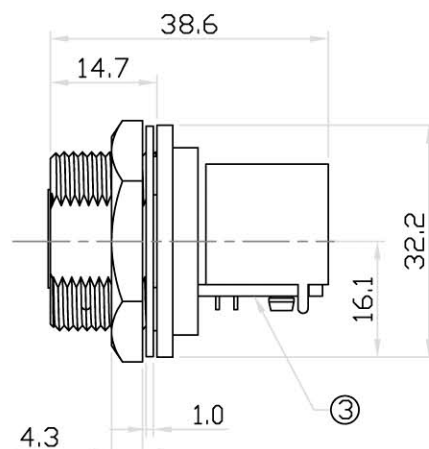
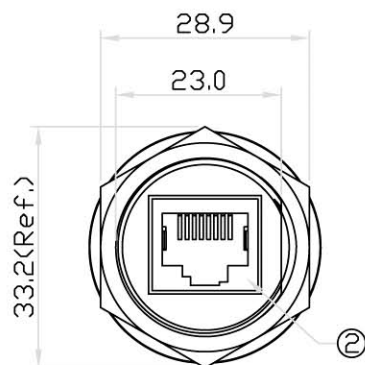


RECOMMENDED
PANEL CUT OUT

RoHS

IP66

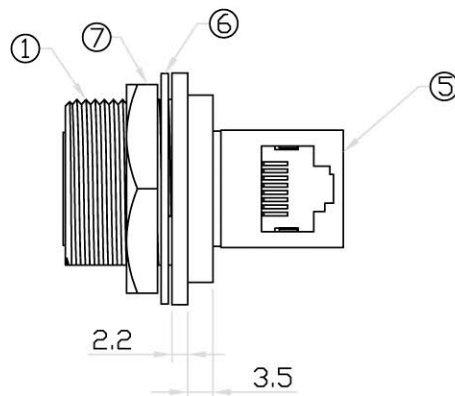

PIN ASSIGNMENT
FRONT VIEW
(前視圖)


原型號爲:RJ45D-PJCSJ
(OLD NO.)

7	HEX NUT	NYLON+GF.	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	RJ45 JACK	RJ45 Jack with shield. Straight type.		1	
4	GLUE	EPOXY.	BLACK	1	
3	PCB	FR4, Double side 1.6mm Thickness.		1	
2	RJ45 JACK	RJ45 Jack with shield. Right angle with filter type.		1	
1	CONNECTOR	RJ45 Jack connector body. NYLON+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

REV	DESCRIPTION	DATE
A	ISSUE	Mar/07/2014
A1	Add Pin assignment	Aug/27/2015

		UNIT:mm	TITLE : RJ45 JACK D Size Panel Connector Rear Mount Screw Type Round Flange With Straight Angle RJ45 Shield Jack	
SCALE		1:1	P/N: RJ45D-P3CRJ	DR: Patty
UNLESS OTHERWISE SPECIFIED TOLERANCES: X ±0.5 XX ±0.25 XXX ±0.1 ANGLE ±1°				CH: ERIC
REV: A1	SHEET: 1/1	DWG.NO: RJ45D-P3CRJ	AP:	

REV.	DESCRIPTION	DATE
A	ISSUE	Sep/08/2011
A1	Change part number.	Mar/06/2014
B	Change Design	Jun/17/2014

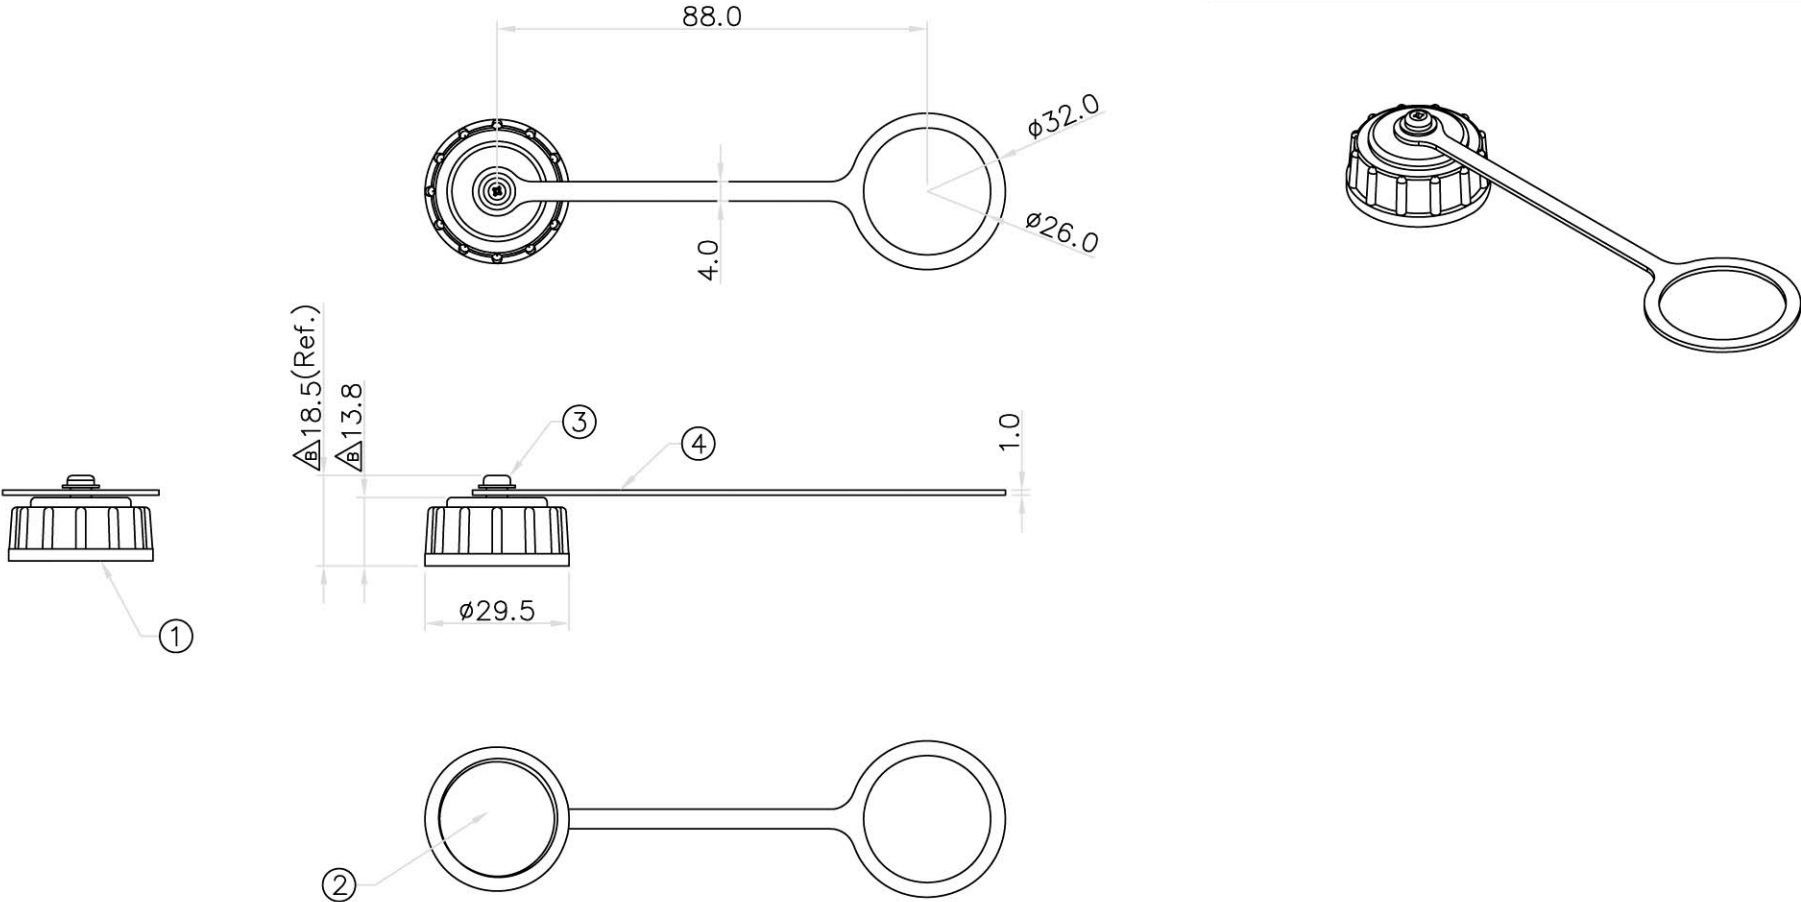

NOTE:
Panel Thickness Max. 2mm.

4	CHAIN	Plastic Rubber.	BLACK	1	59-135-N2
3	SCREW	P ϕ /W=7.5 3x6 TP-1, SUS		1	
2	GASKET	Plastic Rubber.	BLACK	1	
1	CAP	Screw Type Cap, NYLON+GF.	BLACK	1	85-135-N2
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

UNIT: mm	TITLE : Waterproof Cap Screw Type For D Size Male Connector Lock & Screw Type With Rubber Chain	
SCALE	1:1.5	
UNLESS OTHERWISE SPECIFIED TOLERANCES: X \pm 0.25 ,XX \pm 0.1 XXX \pm 0.05 ANGLE \pm 1 $^{\circ}$ X		
REV. B	SHEET 1/1	DWG.NO. CDX-WCAP-MB
		DR. Patty
		CH. ERIC
		AP.