

ROHS Compliant

Date 2010/02/01


Revision B

Features :

- RJ45 complies with FCC part 68 standard
- Jack insertion life >750 mating cycles
- Operating temperature : -40°C~+60°C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max. 0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric with standing voltage : 100V

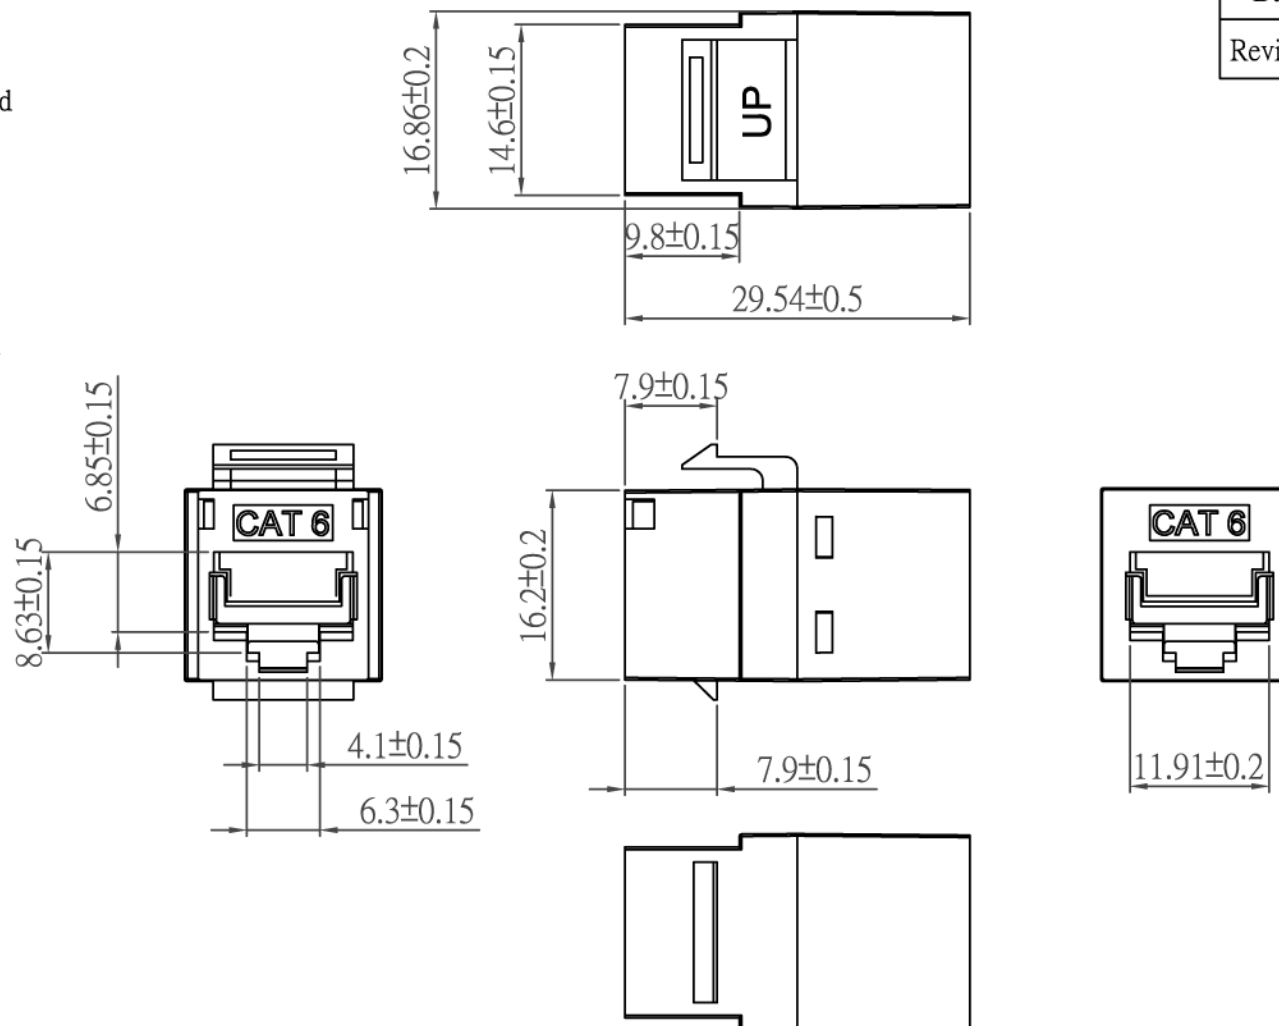

TOLERANCE

.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

TECHNICAL DATA

CATEGORY	☐ CAT.5E ☒ CAT.6 ☐ CAT.3 ☐ OTHER _____
HOUSING	ABS + PC UL94V-0
CONTACT	0.46 mm DIAMETER PHOSPHOR BRONZE GOLD PLATED OVER NICKEL
GOLD-PLATING	☐ 0.0762 um / 3u inch ☐ 0.15 um / 6u inch ☐ 0.38 um / 15u inch ☐ 0.76 um / 30u inch ☒ 1.27 um / 50u inch
COLOR	☒ WHITE ☐ BLACK ☐ GREEN ☐ BLUE ☐ YELLOW ☐ RED ☐ ORANGE ☐ IVORY ☐ OTHER _____
TYPE OF PRODUCT	☒ UNSHIELD ☐ SHIELD : 0.25mm THICKNESS COPPER ALLOY WITH NICKLE PLATED

P/NO. SY-350C8

ITEM.	CO. SY	S/N. SY-350C8
DR. Breaker2009/04/06	APPD.	CHKD.
		FILE. SY-350C8
		SCALE /
		UNIT mm SIZE A4