

ROHS Compliant

Date 2010/01/07






Revision A

Features :

- RJ45 complies with FCC part 68 standard
- Jack insertion life >750 mating cycles
- Operating temperature : -40°C~+60°C

Electrical :

- Contact resistance : 20m ohm
- DC Current rating : 1.5Amps
- DC resistance : Max. 0.1 ohm
- Insulation Resistance : 500m ohm
- Dielectric withstanding voltage : 1000V

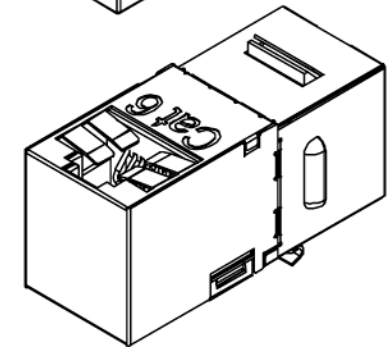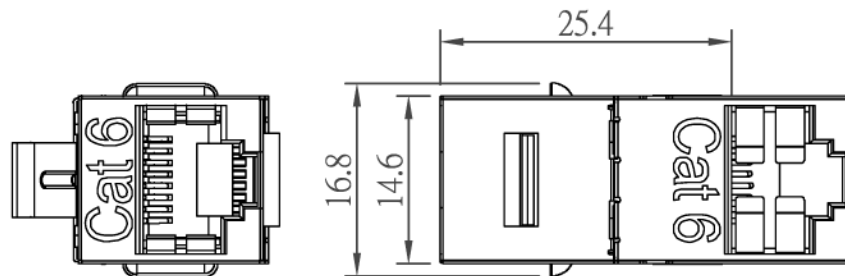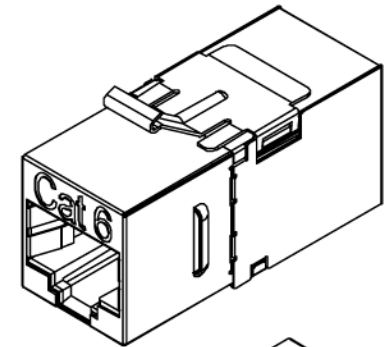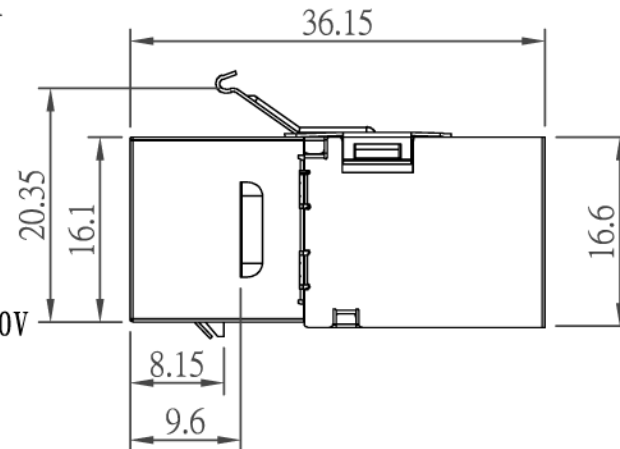

TOLERANCE

.XXXX	----
.XXX	0.10
.XX	0.25
.X	0.38

TECHNICAL DATA


CATEGORY	☐ CAT.5E ☒ CAT.6 ☐ CAT.3 ☐ OTHER _____
HOUSING	ABS + PC UL94V-0
SPRING WIRE	PHOSPHOR BRONZE 3u" AU / 30u" PdNi over 60u" Nickel undercoat
COLOR	☐ WHITE ☐ BLACK ☐ GREEN ☐ BLUE ☐ YELLOW ☐ RED ☐ ORANGE ☐ IVORY ☐ OTHER _____
TYPE OF PRODUCT	☐ UNSHIELD ☒ SHIELD : 0.25mm THICKNESS COPPER ALLOY WITH NICKLE PLATED

P/NO. SY-350SR8-C6

ITEM. Keystone Jack	CO. SY	S/N. SY-350SR8-C6
DR. Breaker2010/01/07	APPD.	CHKD.

FILE. SY-350SR8-C6

SCALE /



UNIT mm

SIZE A4