



ROHS Compliant

DATE	2022/11/16
Revision	B

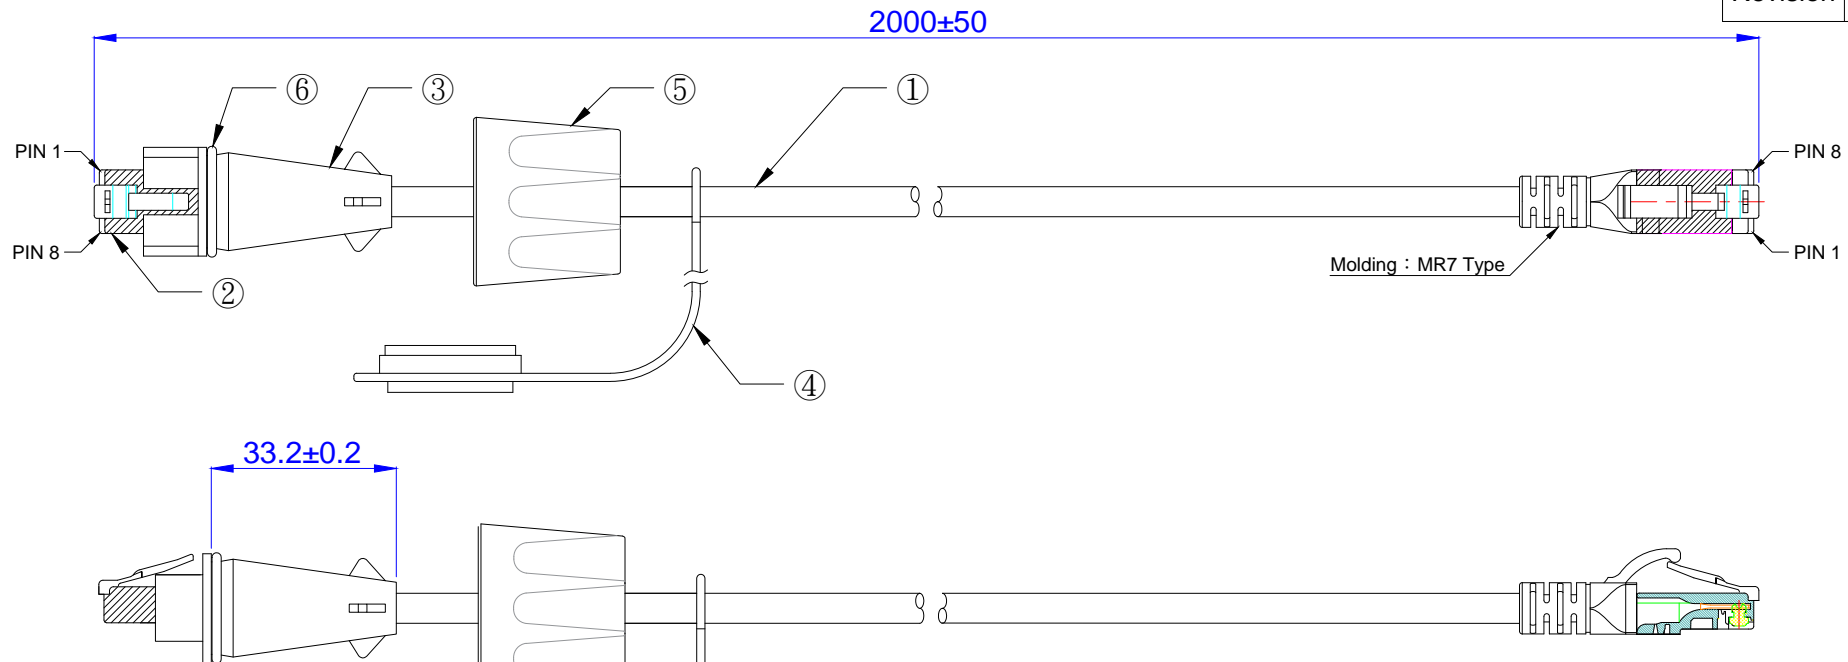

IP68
 ACCORDING TO IEC 60529
 Degrees of Protection Provided by Enclosures
 6:Dust-tight
 8:Protected from immersion in water for 60 minutes at a depth of 1.5 meter.

SPECIFICATION :
 1.The material of cords is a kind of multicore cords and they meet the requirements stipulated in TIA/EIA-568-C.2 about CAT6 of patch cords.
 2.Support 250 MHz broadband
 3.Max. Conductor DC Resistance (Ω /KM) #26:149
 4.Min.Insulation Resistance (Ω -M) PE:100M
 5.Dielectric Strength AC-500V/1 Min

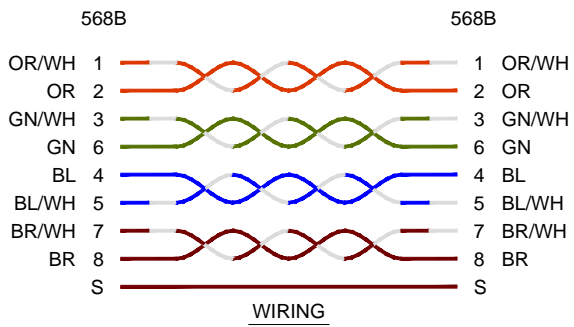

P/NO.		SY-WPBK-C6-2	
ITEM.	CO.	S/N. SY-WPBK-C6-2	
DR.	APPD.	CHKD.	
		FILE. SY-WPBK-C6-2	
		SCALE /	
		UNIT mm	SIZE A4

MATERIAL			
①	CABLE	FTP CAT.6 OUTDOOR 26AWG Color : BLACK	④ DUSTPROOF CAP PVC, BLACK
②	PLUG	STP RJ45 8P8C 50U"	⑤ SCREW PBT, BLACK
③	HOOD	PVC 60P,UL94V-0	⑥ O-RING EPDM RUBBER, BLACK
包裝		單包裝，貼料號	