REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	/	2019/08/24	
B	變更USB A/M 模具	2019/09/12	
C	修改螺絲尺寸(長度增長)	2019/10/09	
D	設變為客戶料號	2019/10/28	

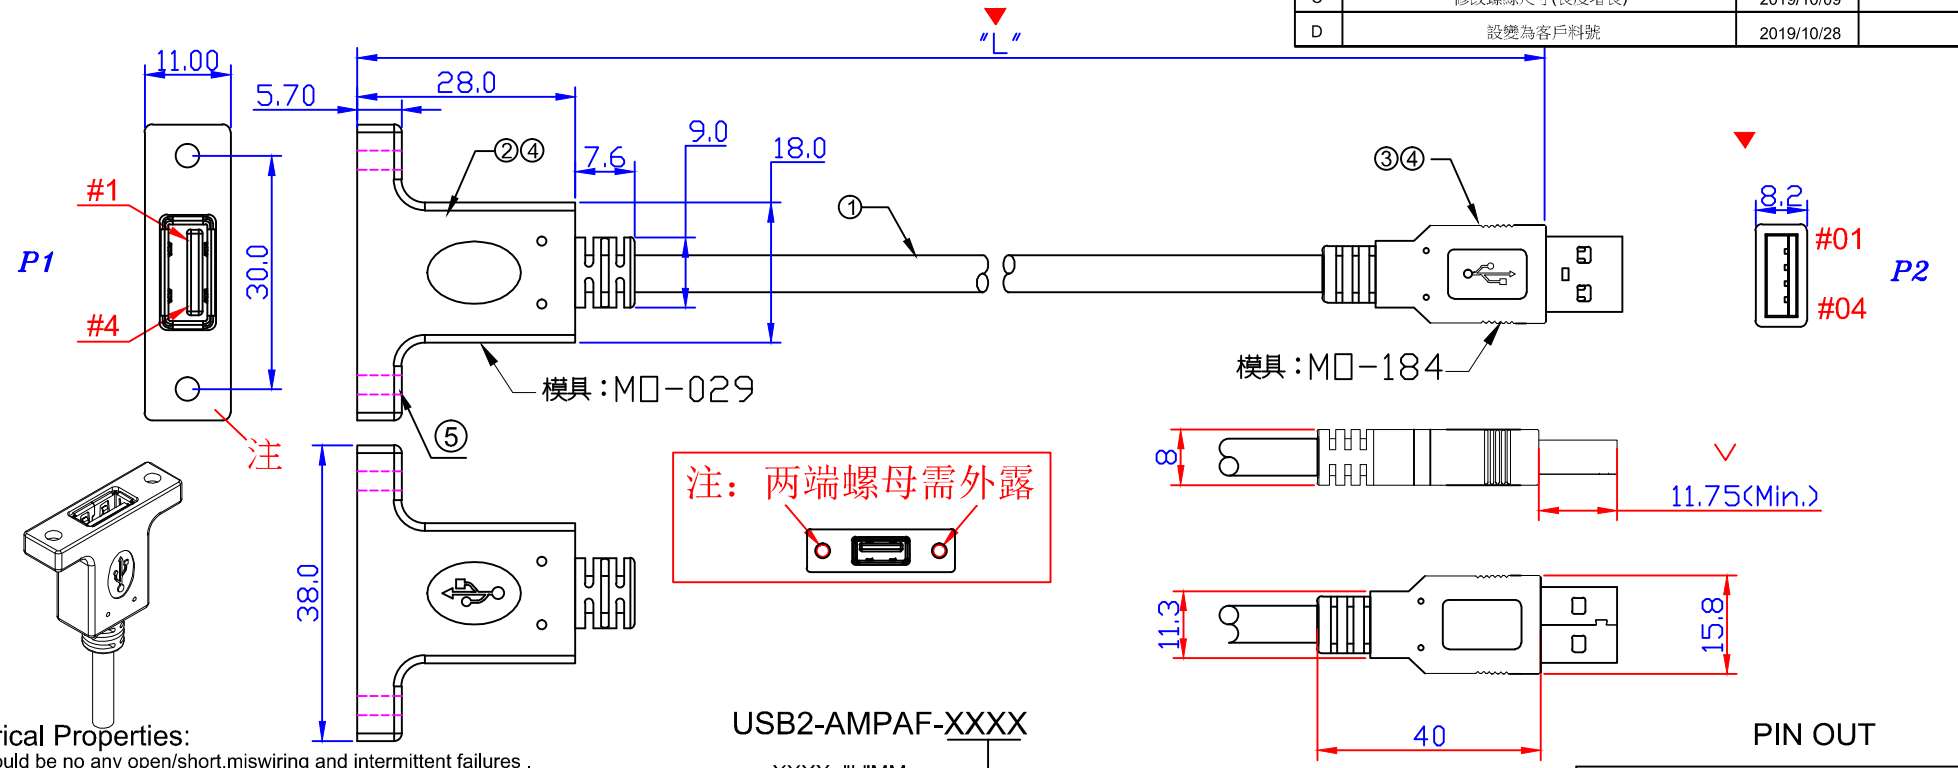

Electrical Properties:

1. It should be no any open/short,miswiring and intermittent failures .
2. The cable shall be 100% electrical test .
3. Voltage test: DC 300V 10MS;
   Insulation resistance: 5.0M ohm/min;
   Conductance resistance: 5.0 ohm/max .

Machinery Character:

1.ALL dimension are"mm/inch" except specified.
2.The cable should be clean,free of oiled/flash/burred.
3.Cable Ass'y shall be RoHS Compliant .

Marked"▼"Shoud Be FAI DIM.

USB2-AMPAF-XXXX

XXXX="L"MM

L=200.0~500.0MM,Tolerance±20.0MM
L=501.0~1000.0MM,Tolerance±30.0MM
L=1001.0~2000.0MM,Tolerance±40.0MM
L=2001.0~2500.0MM,Tolerance±50.0MM
L=2501.0MM Above,Tolerance±100.0MM

PIN OUT

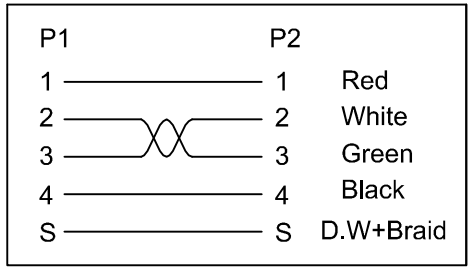

Item	DESCRIPTION	UNIT	QT'Y
5	Nut: 銅料□5.0*L5.6, M3	PCS	2
4	Outer molded: 35P PVC, color:Black.	KG	/
3	Conn: USB A type male solder type, inside white,pin gold flash.	SET	1
2	Conn: USB A type female solder type, inside white,pin gold flash.	SET	1
1	Cable: UL2725 28AWG*1pair+24AWG*2C+AL/MY+D.W+braid, OD=4.5±0.15mm , Jacket Color : Black.	MM	

X ±	X° ±	NAME: BN	
.X ±	.X° ±		
.XX ±	.XX° ±		
UNITS: MM	PART NO.: USB2-AMPAF-XXXX	TITLE: USB AM TO AF Cable	
		DWG NO.:	
APPD BY	CHECK BY	DRAWN BY: 2019/10/28	SCALE: NONE / SHEET: 1/2 / REV.: D

RoHS COMPLIANT