


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	/		

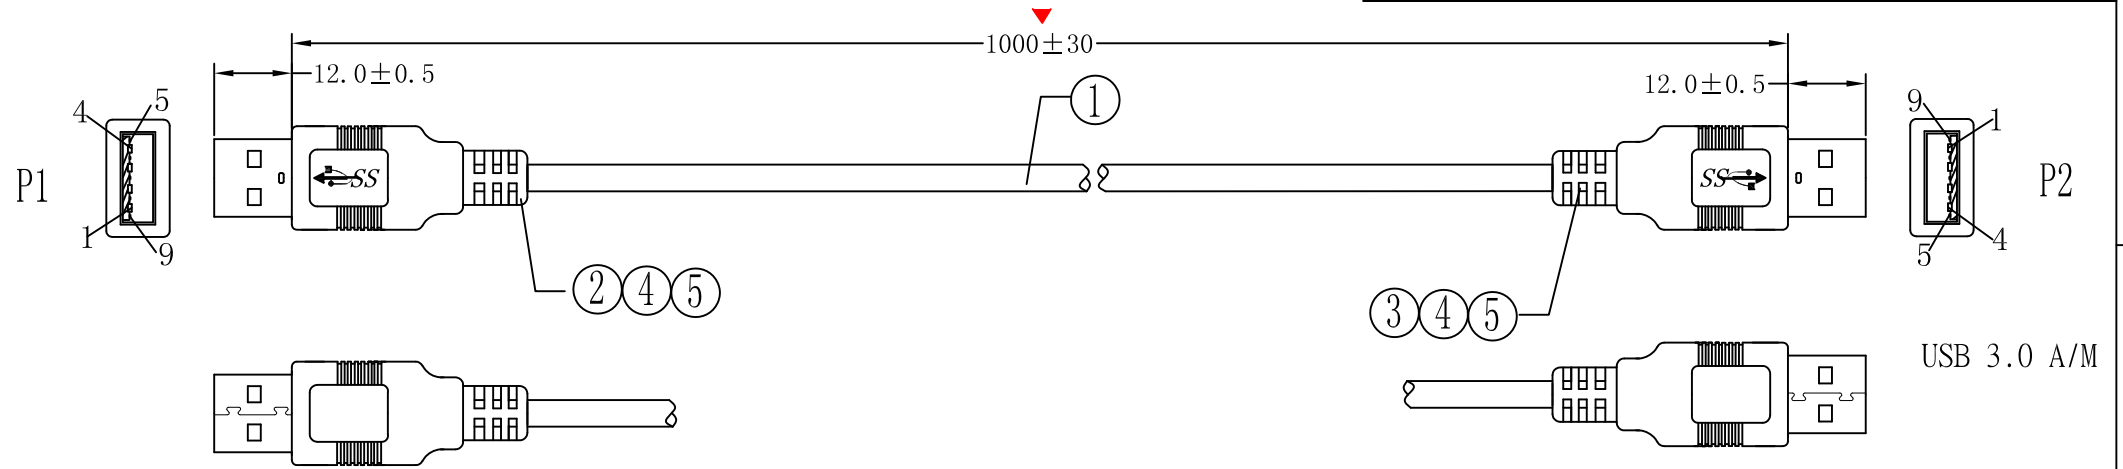


Conn. 1 USB3.0 A Male

- NOTES:
- 1: ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE ARE NOT PERMITTED.
  - 2: CABLE MUST IS RoHS COMPLIANT
  - 3: TEST CANDITIONS:TEST VOLTAGE: DC 300V/0.01S  
INSULATION RESISTANCE: 10M ohm(MIN)  
CONDUCTION RESISTANCE: 3 ohm(MAX)

Marked"▼"Shoud Be FAI DIM.


PIN ASSIGNMENT

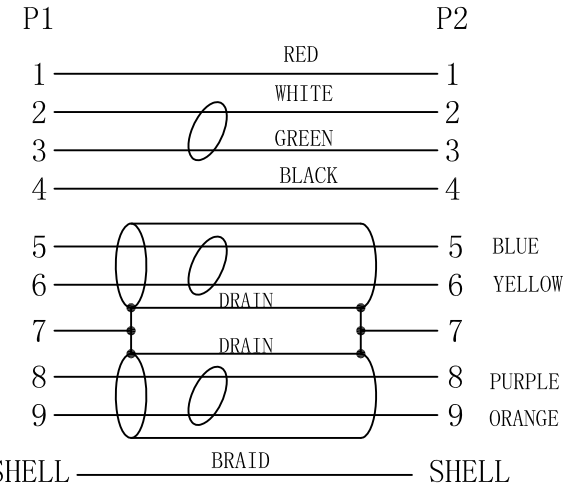

NO	P/N	DESCRIPTION	QTY	UNIT
5	INNERMOLD	TS001 LD-PE	5	g
4	OVERMOLD	PVC 45P BLUE	15	g
3	CONN.	USB 3.0 A MALE PIN:GOLD PLATED PBT:BLUE INSULATOR-短体	1	SET
2	CONN.	USB 3.0 A MALE PIN:GOLD PLATED PBT:BLUE INSULATOR-短体	1	SET
1	CABLE	UL20276 USB 3.0 (28AWG/IP+DAM)*2+28AWG*1P+24AWG*2C +FILLER+DW+AL/MY+BRAID+JACKET OD:6.0±0.15mm PVC JACKET:BLUE	1000	mm

X ±	X° ±	NAME:	
.X ±	.X° ±		
.XX ±	.XX° ±	UNITS: MM	PART NO.: USB3-AMAM-ST-1
		TITLE: USB3.0 AM TO AM Cable	DWG NO.:
			SCALE SHEET REV. NONE 1/2 A
APPD BY	CHECK BY	DRAWN BY	

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	/		

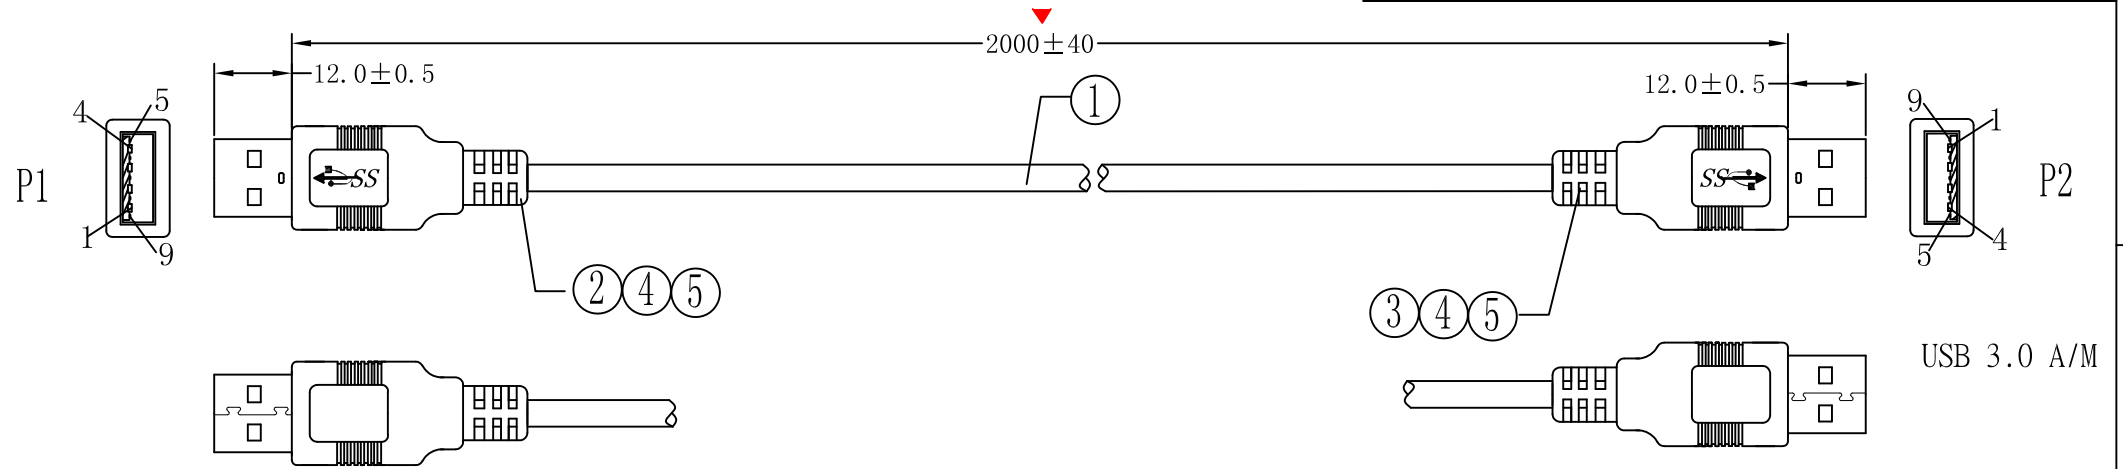


Conn. 1 USB3.0 A Male

NOTES:

- 1: ANY OPEN OR MISWIRE SHORT OR INTERMITTENCE ARE NOT PERMITTED.
- 2: CABLE MUST IS RoHS COMPLIANT
- 3: TEST CANDITIONS: TEST VOLTAGE: DC 300V/0.01S  
INSULATION RESISTANCE: 10M ohm(MIN)  
CONDUCTION RESISTANCE: 3 ohm(MAX)

Marked"▼"Shoud Be FAI DIM.

PIN ASSIGNMENT

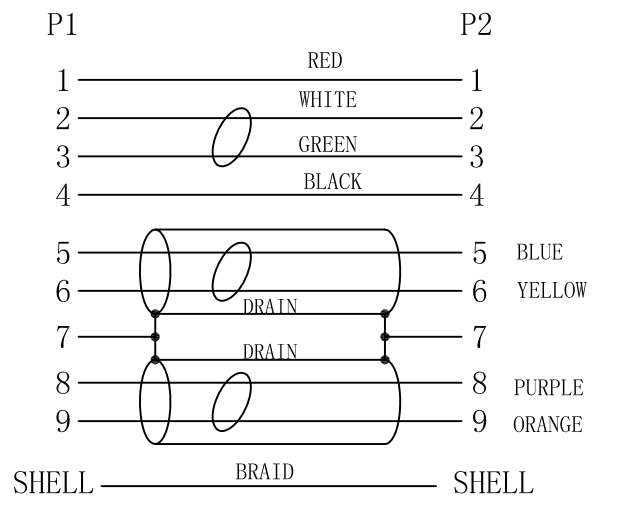

5	INNERMOLD	TS001 LD-PE	5	g
4	OVERMOLD	PVC 45P BLUE	15	g
3	CONN.	USB 3.0 A MALE PIN:GOLD PLATED PBT:BLUE INSULATOR-短体	1	SET
2	CONN.	USB 3.0 A MALE PIN:GOLD PLATED PBT:BLUE INSULATOR-短体	1	SET
1	CABLE	UL20276 USB 3.0 (28AWG/IP+DAM)*2+28AWG*1P+24AWG*2C +FILLER+DW+AL/MY+BRAID+JACKET OD:6.0±0.15mm PVC JACKET:BLUE	2000	mm
NO	P/N	DESCRIPTION	QTY	UNIT

X ±	X° ±	NAME:		
.X ±	.X° ±			
.XX ±	.XX° ±	UNITS: MM	PART NO.: USB3-AMAM-ST-2	TITLE: USB3.0 AM TO AM Cable
		DWG NO.:		
		APPD BY	CHECK BY	DRAWN BY
		SCALE	SHEET	REV.
		NONE	1/2	A