


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	/	2019/10/24	
B	設變為客戶料號	2019/10/28	
C	錯誤修正	2019/12/25	

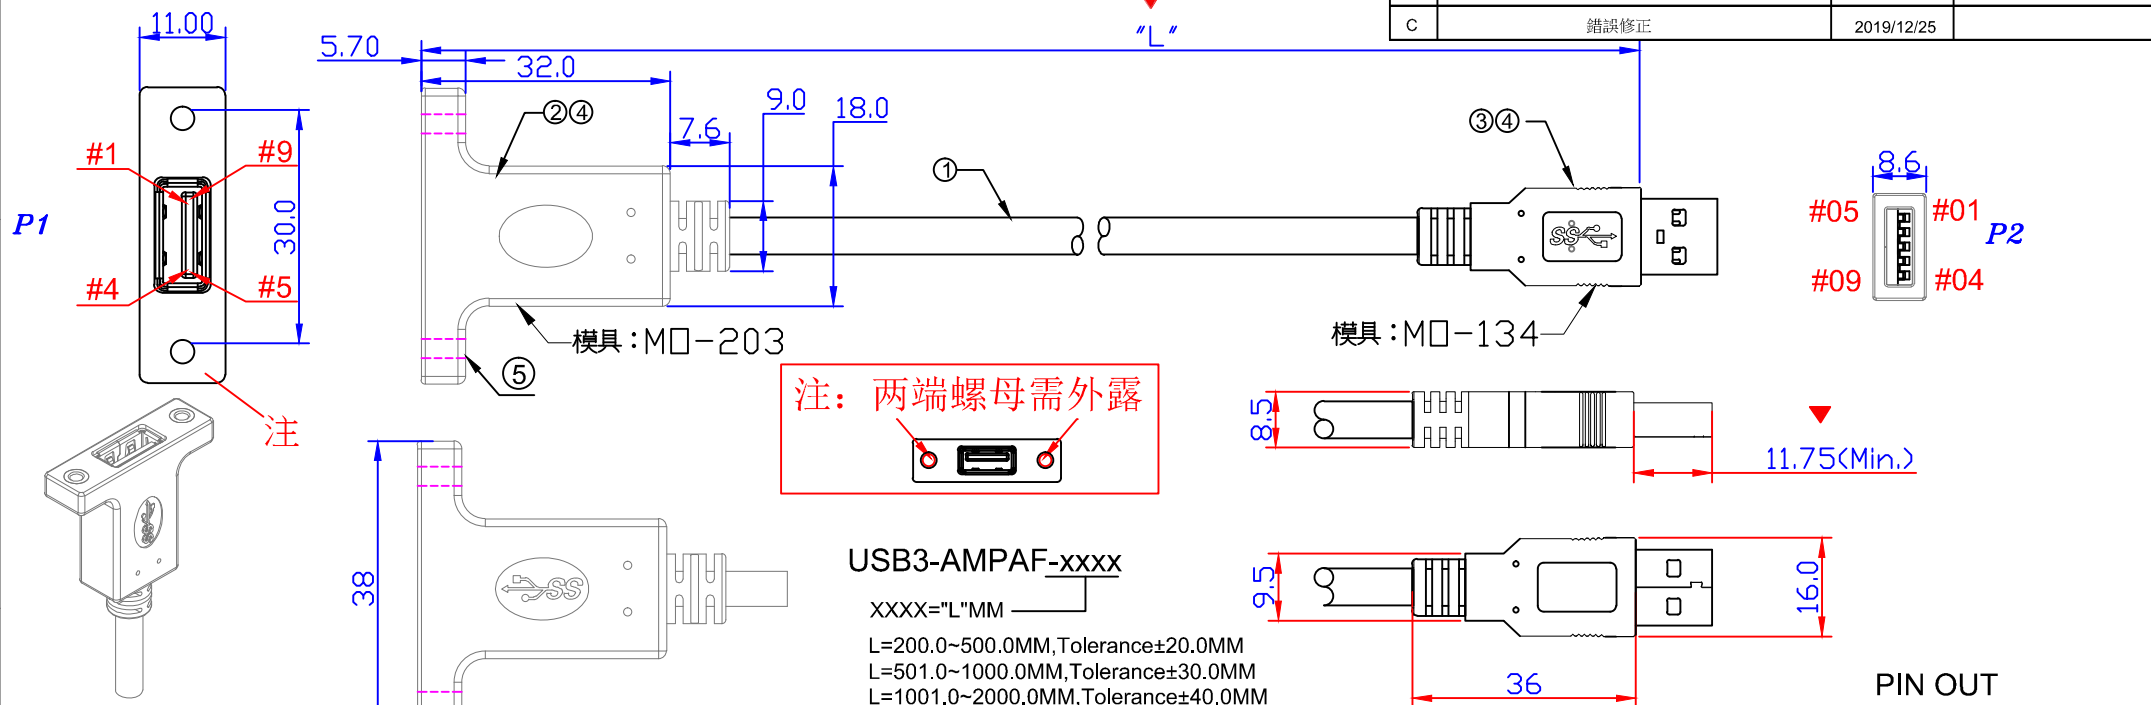

USB3-AMPAF-xxxx

xxxx="L"MM
 L=200.0~500.0MM,Tolerance±20.0MM
 L=501.0~1000.0MM,Tolerance±30.0MM
 L=1001.0~2000.0MM,Tolerance±40.0MM
 L=2001.0~2500.0MM,Tolerance±50.0MM
 L=2501.0MM Above,Tolerance±100.0MM

Electrical Properties:


1. It should be no any open/short,miswiring and intermittent failures .
2. The cable shall be 100% electrical test .
3. Voltage test: DC 300V 10MS;
 Insulation resistance: 5.0M ohm/min;
 Conductance resistance: 5.0 ohm/max .

Machinery Character:

- 1.ALL dimension are"mm/inch" except specified.
- 2.The cable should be clean,free of oiled/flash/burred.
- 3.Cable Ass'y shall be RoHS Compliant .

Marked"▼"Shoud Be FAI DIM.

PIN OUT

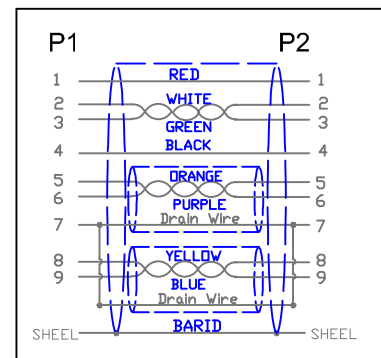

Item	DESCRIPTION	UNIT	QTY
5	Nut: 銅料□5.0*L5.6,M3.	PCS	2
4	Outer molded: 35P PVC, color:Blue.	KG	/
3	Conn: USB A type3.0 male solder type, inside white,pin gold flash.	SET	1
2	Conn: USB A type3.0 female solder type, inside white,pin gold flash.	SET	1
1	Cable:UL20276(28AWG/1P+DAM)*2+28AWG/1P+24AWG/2C+FILLER+DW+AL/MY+BRAID+JACKET OD=6.0±0.15mm , Jacket Color : Blue.	MM	

X ±	X° ±	NAME:			
.X ±	.X° ±	BN			
.XX ±	.XX° ±	UNITS:	PART NO.:	TITLE:	
		MM	USB3-AMPAF-xxxx	USB 3.0 A/M to USB A/F (M3螺絲) Cable, UL20276, OD6.0, Blue.	
		APPD BY	CHECK BY	DRAWN BY	DWG NO.:
			SCALE	SHEET	REV.
			NONE	1/2	C