






REV.	DESCRIPTION	DATE
A	ISSUE	Sep/24/2015
A1	Correct pin assignment drawing	Oct/14/2015
B	Correct overmold length.	Aug/29/2016
B1	Correct cable spec.	Sep/30/2017
note1	Correct P/N & Dwg No.(EC-111008)	Aug/26/2022

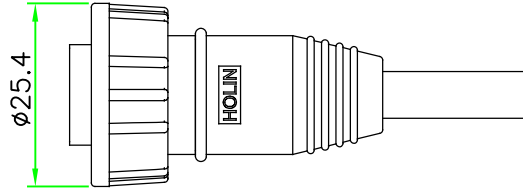

HDMAC-P4SN Δ
(IP66)

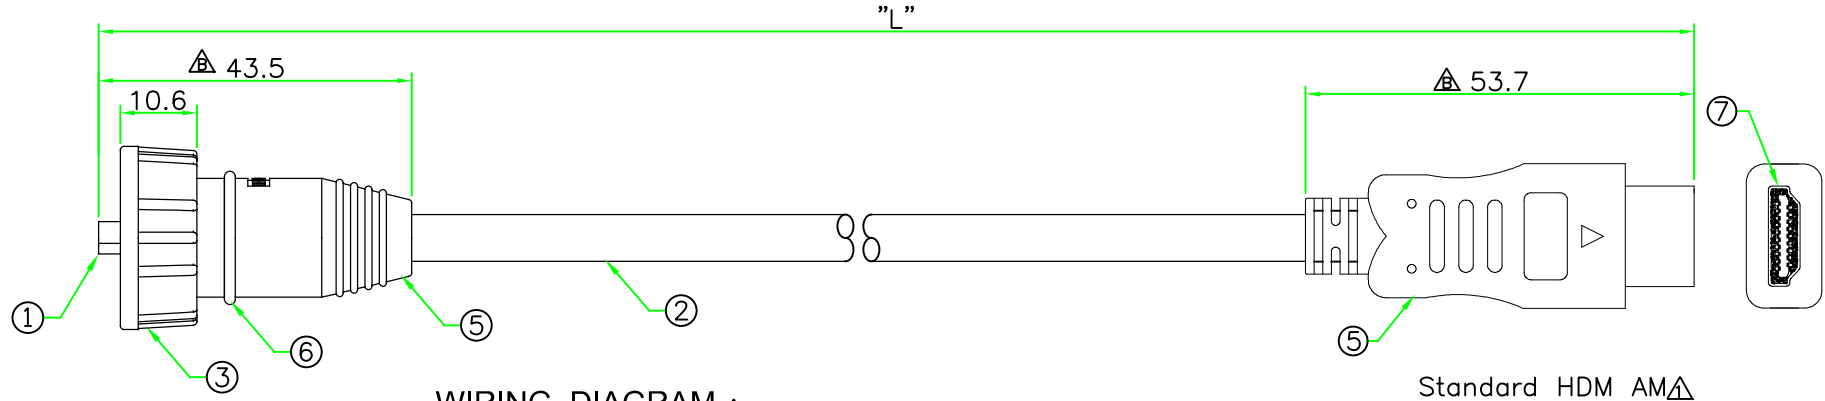


WIRING DIAGRAM Δ

Standard HDM A Δ



P/N Δ	L
WHDMAC-PB-2M	2000±100

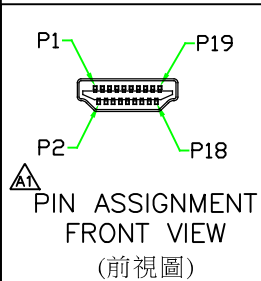

No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS
7	CONNECTOR	HDMI A 19P MALE SOLDER CONNECTOR. 15u" Gold Plating.		1	
6	O-RING	EPDM.	BLACK	1	
5	OVER MOLDED	PVC	BLACK	2	
4	GASKET	RUBBER	BLACK	1	
3	SCREW NUT	NYLON+GF.	BLACK	1	
2	CABLE Δ	UL20276 [(30AWGx1P+AL+D+MY)x5C + 30AWGx4C] + Al/My+Braid OD: 6.5mm	BLACK	1	
1	CONNECTOR	HDMI A 19P Male solder connector. Gold flash.		1	

 UNIT: mm SCALE 1:1 UNLESS OTHERWISE SPECIFIED TOLERANCES: .XX ±1.0 .X ±1.0 .XX ±0.5 .XXX ±0.25 ANGLE ± 1'	TITLE : HDMI A Type 19P Male Waterproof to Standard Molded Cable	
	P/N: WHDMAC-PB-xxM Δ	DR. CH.
REV. B1 SHEET 1/1	DWG.NO: WHDMAC-PB-xxM Δ	