


WIRE CONNECTION

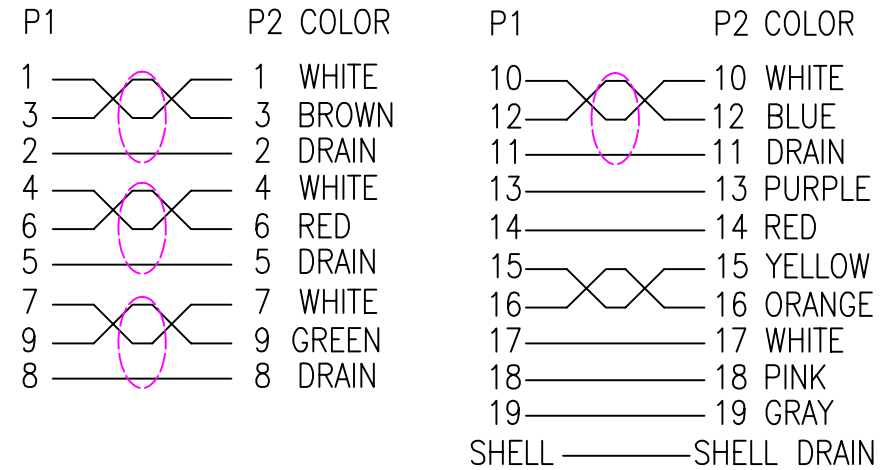

NOTE:

- CABLE: High Speed HDMI® CABLE UL20276 (24AWG\*1P+D -Free-edge-AL)\*4C+24AWG\*1P+24AWG\*5C+AL/MY+DRAIN (BARE COPPER)+BRAID(A-M ALLOY),PVC JACKET BLACK OD:10±0.15mm.
- CONNECTOR:P1,P2:HDMI 19P MALE,SOLDER TYPE,GOLD 30U” PLATED CONTACTS,INSULATION:BLACK,GOLD PLATED SHELL, PCB TYPE.
- ALL HOOD:MOLDED BLACK 45P PVC.
- 100% OPEN AND SHORT TESTING:
- MOLD P/N: HDMI-04, HDMI-N04.

P/N	L(MM)	TOLERANCE(MM)
DVD-HDMIHDMI-M10	10000	+150/-0
DVD-HDMIHDMI-M15	15000	+300/-0
DVD-HDMIHDMI-M20	20000	+300/-0

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	D
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/20/10			
TITLE				
HDMI19P TO HDMI19P CABLE				
PART NO.				
DVD-HDMIHDMI-MXX				