


P/N	L(M)	L(MM)	T(MM)
DVD-HDMIDVI-M07	7	7000	+150/-0
DVD-HDMIDVI-M10	10	10000	+150/-0
DVD-HDMIDVI-M15	15	15000	+300/-0
DVD-HDMIDVI-M20	20	20000	+300/-0

NOTE:

- CABLE: High Speed HDMI® CABLE UL20276 (24AWG*1P+AL+D+MYLAR)*4C +24AWG*1P+24AWG*5C+AL/MY+DRAIN(BARE COPPER)+BRAID(A-M ALLOY), PVC JACKET BLACK OD:9.0±0.15MM.
- CONNECTOR:P1:HDMI 19P MALE,SOLDER TYPE,GOLD 30U” PLATED CONTACTS, INSULATION:BLACK,GOLD PLATED SHELL,PCB TYPE.
P2:DVI 18+1 MALE,PIN:G/F,INSULATION BLACK,SHELL GOLD PLATED ON TOP AND TIN PLATED ON BOTTOM
- SCREW:#4-40UNC MOLDED WHITE(WH02).
- ALL HOOD:MOLDED 45P PVC.
- TESTING: 100% ELECTRICAL TESTING.
- MOLD NO:OUTER MOLDING:HDMI-2C-N03,HDMI2C-03/04,DVI-03.

WIRE CONNECTION

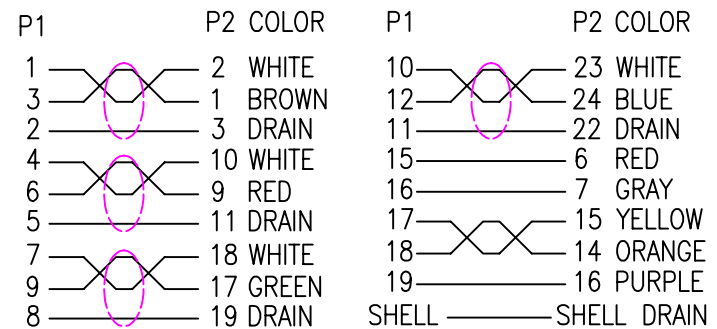

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	B
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	12/06/10			
TITLE				
HDMI19P TO DVI18+1 CABLE				
PART NO.				
DVD-HDMIDVI-MXX				