


WIRE CONNECTION

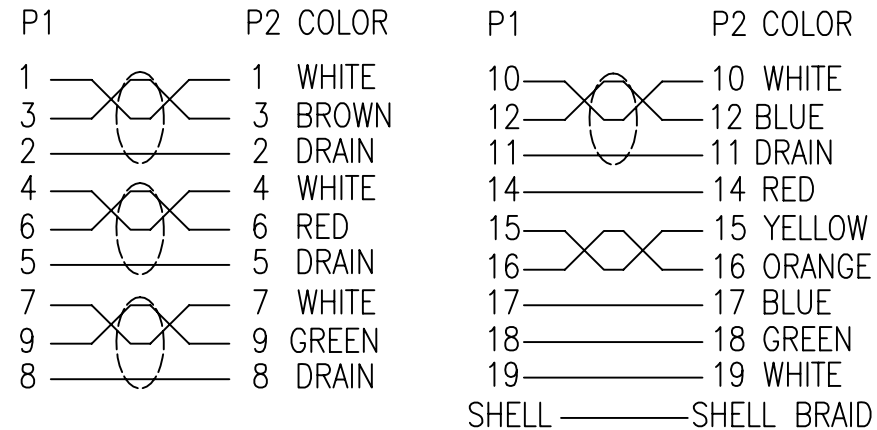

P/N	XX(FT)	L(MM)	TOLERANCE(MM)
DVD-HDMIHDMI-06	06	1829	+75/-0
DVD-HDMIHDMI-10	10	3048	+75/-0
DVD-HDMIHDMI-15	15	4572	+75/-0

NOTE:

- CABLE:UL20276 (28AWG*1P+D-Free-edge-AL)*4C+28AWG*1P+28AWG*5C+AB JACKET COLOR:BLACK OD:7.3±0.15mm.
- CONNECTOR:P1,P2:HDMI 19P MALE,SOLDER TYPE,GOLD 30U” PLATED CONTACTS,INSULATION:BLACK,GOLD PLATED SHELL,PCB TYPE.
- ALL HOOD:MOLDED BLACK 45P PVC.
- 100% OPEN AND SHORT TESTING:
INSULATION RESISTANCE:10M OHM
CONDUCTOR RESISTANCE:3 OHM
VOLTAGE:DC 300V
- MOLD NO:INNER MOLDING:HDMI-N01,OUTER MOLDING:HDMI-01.

NET MECHANISM Corp				
www.cabling-ol.net				
SCALE	NONE		REV	A
UNIT	MM			
SHEET	1/1	DWG NO.		
DATE	06/25/07	TITLE		
HDMI19P TO HDMI19P CABLE				
PART NO.				
DVD-HDMIHDMI-XX				