REVISIONS		
ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7048-88BNDG001-R 型號轉來\04/09/07'

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

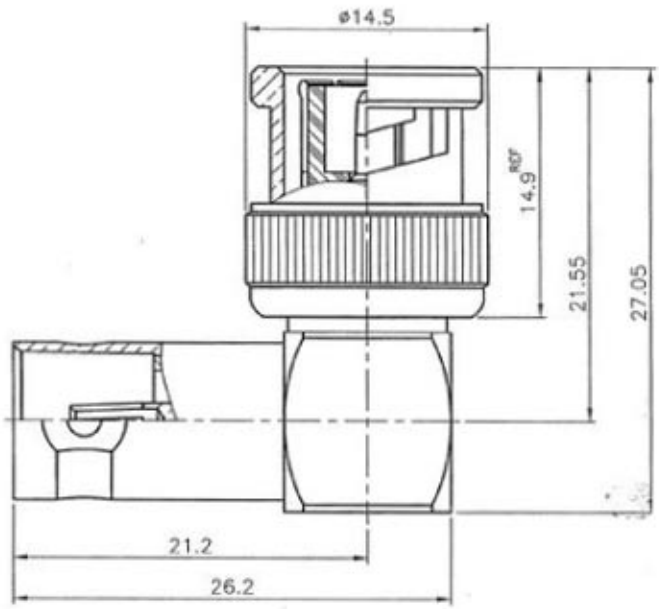

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. PHOSPHOR BRONZE PER QQ-B-750

NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.
	COVER	NOTE 1	NOTE 2		
	SHELL	NOTE 1	NOTE 2		
	GASKET	SILICONE	RED		
	C RING	SS41	NOTE 2		
	SPRING	SK5	NOTE 2		
	WASHER	SS41	NOTE 2		
	CONTACT PIN	NOTE 1	NOTE 3		
	INSULATOR	DELRIN	WHITE		
	BODY	NOTE 1	NOTE 2		
	LOCK RING	NOTE 1	NOTE 2		
	CONTACT PIN	NOTE 4	NOTE 3		
	INSULATOR	DELRIN	WHITE		
	CUBE BODY	NOTE 1	NOTE 2		

DIMENSIONS ARE IN MILLIMETERS

UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差)
0.5~6 = ±0.2
>6~30 = ±0.4
>30~120 = ±0.6
>120~315 = ±1
>315~1000 = ±1.6
ANGLES(角度) = ±5'

SCALE 3/1 ISSUE A1

PART NO.

APPROVED DATE 04/09/07'

CHECKED DATE 04/09/07'

DRAWN DATE 04/09/07'

TITLE BNC R/A JACK TO PLUG ADAPTOR (75 ohms)

DRAWING NO. 7058NR700CF000B

FILE NO. Z:\NND\7058\NR\700\000\7058NR700CF000B-A1