


## REVISIONS

ISS	SYMBOL	DESCRIPTION\DATE
A1		由BJ-7092-88BNDG003-R 规格书 06/23/07

REMARK: RoHS COMPLIANT  
(符合 RoHS)

FOR CUSTOMER

- NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)
1. BRASS PER QQ-B-626
  2. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  3. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
  4. PHOSPHOR BRONZE PER QQ-B-750

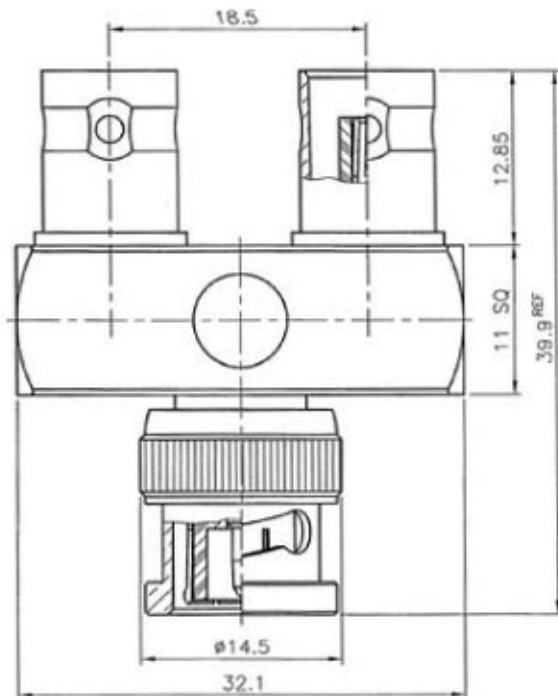

COVER	NOTE 1	NOTE 2	
LOCK RING	NOTE 1	NOTE 2	
CONTACT PIN	NOTE 4	NOTE 3	
INSULATOR	DELIN	WHITE	
BODY	NOTE 1	NOTE 2	
INSULATOR	DELIN	WHITE	
CONTACT PIN	NOTE 1	NOTE 3	
CONTACT PIN	NOTE 1	NOTE 3	
INSULATOR	DELIN	WHITE	
SHELL	NOTE 1	NOTE 2	
GASKET	SILICONE	RED	
C RING	SS41	NOTE 2	
SPRING	SK5	NOTE 2	
WASHER	SS41	NOTE 2	
BODY	NOTE 1	NOTE 2	
CUBE BODY	NOTE 1	NOTE 2	

DIMENSIONS ARE IN MILLIMETERS  
UNLESS OTHERWISE SPECIFIED  
TOLERANCES  
(一般公差)  
0.5-6 = ±0.2  
6-30 = ±0.4  
>30-120 = ±0.6  
>120-315 = ±1  
>315-1000 = ±1.6  
ANGLE(角度) = 8°

PART NO.	
APPROVED	DATE
<i>Ave</i>	06/23/07
CHECKED	DATE
<i>Ave</i>	06/23/07
DRAWN	DATE
<i>Ave</i>	06/23/07

TITLE  
BNC Y LINK JACK-PLUG-JACK  
ADAPTOR

DRAWING NO. 7098NY500CF000B

FILE NO. Z:\IND\7098\NY\500\000\7098NY500CF000B-A1