


ISS	SYMBOL	DESCRIPTION/DATE

REMARK: RoHS COMPLIANT  
(符合 RoHS)

FOR CUSTOMER

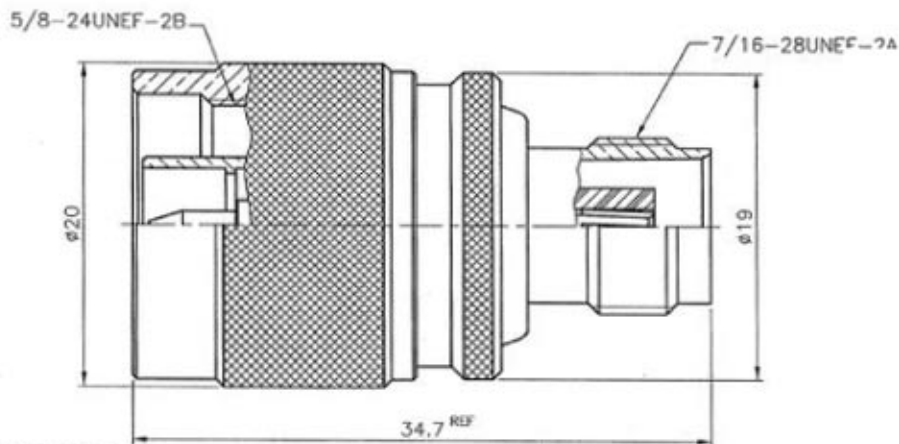

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-19468
5. PHOSPHOR BRONZE PER QQ-B-750
6. BRASS JIS H 3250, C 2700

					DIMENSIONS ARE IN MILLIMETERS		PART NO.			
SHELL	NOTE 1	NOTE 3			UNLESS OTHERWISE SPECIFIED TOLERANCES (一般公差) 0.5-6 = ±0.2 >6-30 = ±0.4 >30-120 = ±0.6 >120-315 = ±1 >315-1000 = ±1.6 ANGLES(角度) = 45°		APPROVED	DATE		
GASKET	SILICONE	RED					<i>Mark</i>	11/05/09		
C RING	NOTE 6	NOTE 3					CHECKED	DATE		
BODY	NOTE 1	NOTE 3					<i>Mark</i>	11/05/09		
CONTACT PIN	NOTE 5	NOTE 2					DRAWN	DATE		
INSULATOR	NOTE 4	WHITE								
BODY	NOTE 1	NOTE 3								
NO.	DESCRIPTION	MATERIAL	FINISH	Q'TY	DRAWING NO.	SCALE	3/1	ISSUE	A1	

TITLE  
N PLUG TO TNC JACK ADAPTOR

DRAWING NO. 73P74JNS5BF000B

FILE NO. Z:\NND\73P\74\JNS\000\73P74JNS5BF000B-A1