


REVISIONS

DESCRIPTION\DATE

ISS SYMBOL

REMARK: RoHS COMPLIANT
(符合 RoHS)

FOR CUSTOMER

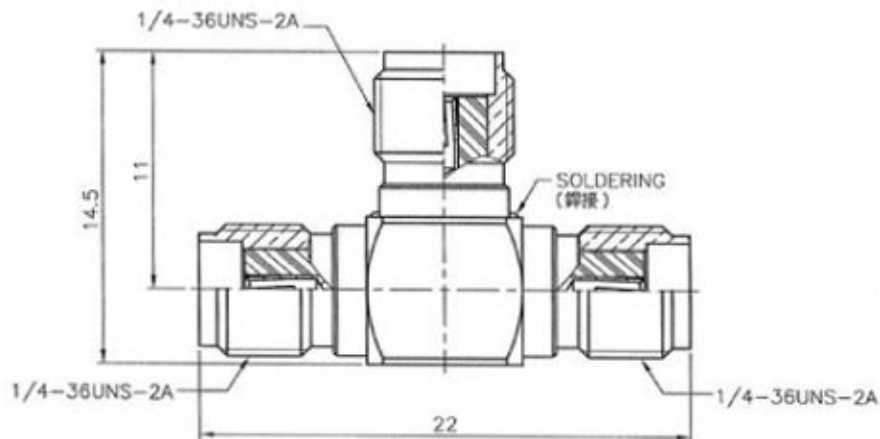

NOTES: FINISH (PLATING THICKNESS IN MICRO-INCHES)

1. BRASS PER QQ-B-626
2. GOLD PL 3 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
3. GOLD PL 30 MIN OVER NICKEL PL 70 MIN THICK OVER COPPER STRIKE
4. TEFLON MIL-P-1946B
5. BERYLLIUM COPPER PER QQ-C-530

					DIMENSIONS ARE IN MILLIMETERS		PART NO.	
					UNLESS OTHERWISE SPECIFIED TOLERANCES		APPROVED	
					(-公差)		DATE	
COVER	NOTE 1	NOTE 2			0.5-6 = ±0.2	02/24/10'		
CONTACT PIN	NOTE 5	NOTE 3			>6-30 = ±0.4	CHECKED		
CONTACT PIN	NOTE 5	NOTE 3			>30-120 = ±0.6	DATE		
INSULATOR	NOTE 4	WHITE			>120-315 = ±1	02/24/10'		
MAIN BODY	NOTE 1	NOTE 2			>315-1000 = ±1.6	DRAWN		
					ANGLES(角度) = ±5°		DATE	
							02/24/10'	

TITLE
SMA T-ANGLE JACK-JACK-JACK
ADAPTOR

DRAWING NO. 7888NT500BD000B

FILE NO. Z:\IND\7888\NT\500\000\7888NT500BD000B-A1